


## GLEN BALL VALVES

### Specifications

- Floating Ball Design for improved sealing and higher pressure
- Bi-directional operation
- Compact valve with minimum parts
- Full bore design reduces turbulence and decreases pressure drop through valve
- Robust cast body
- Spindle designed to prevent possibility of blow out
- Valve maintenance done in-situ
- Handles replaced easily by removing nyloc nut

### Material of Construction

<b>Handle</b>	Mild Steel
<b>Spindle</b>	Stainless Steel
<b>Seats</b>	Nitrile / 25mm is Polyurethane
<b>Ball</b>	Stainless Steel
<b>Fasteners</b>	4.8 Carbon Nut & Spring Washer
<b>Body &amp; Cap</b>	SG Iron
<b>Coating</b>	Painted

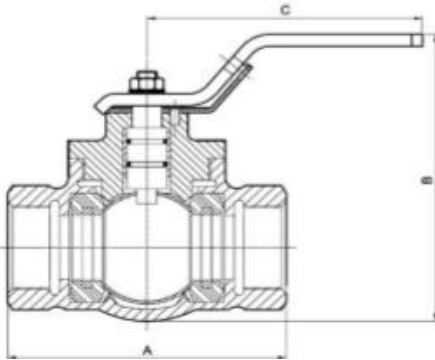

50mm Shouldered x 25mm Ball Valve



Screwed Ball Valve With Lock

"S" Claw x BSP Ball Valve

CODE	SIZE	DESCRIPTION	A (mm)	B (mm)	C (mm)	PRESSURE (kPa)	TEMPERATURE (°C)
VBASC0151	15mm	BSP GLEN SCREWED BALL VALVE MK3	85	75	75	3500	-20 to 82
VBASC0201	20mm	BSP GLEN SCREWED BALL VALVE MK3	93	95	110	5400	-20 to 82
VBASC0253N	25mm	NPT GLEN SCREWED BALL VALVE MK3 WITH LOCKABLE HANDLE	110	105	115	5400	-20 to 82
VBASC253L	25mm	BSP GLEN SCREWED BALL VALVE MK3 WITH LOCKABLE HANDLE	110	105	115	5400	-20 to 82
BA250BBC	25mm	BSP GLEN SERIES 2000 SCREWED BALL VALVE WITH LOCKABLE HANDLE	95	80	125	5400	-20 to 82
BA320BBC	32mm	BSP GLEN SERIES 2000 SCREWED BALL VALVE WITH LOCKABLE HANDLE	95	80	125	5400	-20 to 82
BA400BBC	40mm	BSP GLEN SERIES 2000 SCREWED BALL VALVE WITH LOCKABLE HANDLE	150	155	165	4100	-20 to 82
VBASC0503	50mm	BSP GLEN SCREWED BALL VALVE MK3 (HEAVY DUTY)	175	190	250	4100	-20 to 82
BA5000BC	50mm	BSP GLEN SERIES 2000 SCREWED BALL VALVE WITH LOCKABLE HANDLE	150	155	165	4100	-20 to 82
VBASC0801	80mm	BSP GLEN SCREWED BALL VALVE MK1	250	225	195	2700	-20 to 82
VBALH5025L	50x25mm	50mm SHOULDERED X 25mm BSP SCREWED BALL VALVE WITH LOCKABLE HANDLE	120	115	135	5400	-20 to 82
VBALH5025G	50x25mm	50mm GROOVED X 25mm NPT SCREWED BALL VALVE WITH LOCKABLE HANDLE	120	115	135	5400	-20 to 82
BA250BWC	25mm	"S" CLAW X BSP GLEN BALL VALVE SERIES 2000 WITH LOCKABLE HANDLE	98	85	124	3500	-20 to 82
BA500BWC	50mm	"S" CLAW X BSP GLEN BALL VALVE SERIES 2000 WITH LOCKABLE HANDLE	150	165	175	4100	-20 to 82
BA250SS	25mm	"S" CLAW X "S" CLAW GLEN BALL VALVE SERIES 2000 WITH LOCKABLE HANDLE	128	85	135	3500	-20 to 82
BA500SSC	50mm	GLEN SERIES 2000 SHOULDERED BALL VALVE WITH LOCKABLE HANDLE	135	145	172	4100	-20 to 82
VBASH0801	80mm	GLEN SHOULDERED BALL VALVE MK1	255	225	195	2700	-20 to 82
VBASH1001	100mm	GLEN SHOULDERED BALL VALVE MK1	280	285	195	2700	-20 to 82